THERMOBILE



PROHEAT Cabinet oil fired with flue connection and built-in fueltank



Advantages of THERMOBILE PROHEAT series:

Low-noise radial fan. ● Large air volumes guarantee quick heating. ● Standard equipped with thermostat.



APPLICATIONS

Erp 2018 Compliant

AUTOMOTIVE: Heating garage workshops, valeting bays,

commercial workshops.

AGRICULTURE: Heating workshops.

INDUSTRY: Heating and frost protection of warehouses,

halls, transit sheds.





FEATURES

: Capacities of 30 and 100 kW net, with an efficiency of 92%

:Plug- and- play principle, quick and easy to install.

- :Standard model Four adjustable outlets equal air distribution and connection for air duct.
- :Swivel head models available with 2 x adjustable swivel heads
- : Combustion chamber and heat exchanger of heat resistant steel.
- : Control panel fitted with fan only facility, warning lights and built in thermostat.



Pro heat 100 S/H

| | | | | APPROX.FU | EL | HEATED | CAPACITY | POWER | FLUE | | |
|----------------|----------------|--------------|-----------|-----------|-------|---------|------------------|------------------|------------|------------|----------|
| Model | Part Number | MAX. NETT HE | AT OUTPUT | CONS. OIL | | AIRFLOW | FUEL TANK | CONSUMPTION | CONNECTION | THERMOSTAT | INTEGRAL |
| | | Btu/hr | Kw | L/hr | KG/hr | M3/hr | LTR | 230V/400V (AMPS) | Ø MM | CONNECTION | TANK |
| ProHeat 30 | 98.087.300 ERP | 104,000 | 30 | 3,4 | 2,8 | 1,900 | 55 | 2.8 | 120 | YES | BUILT-IN |
| ProHeat 60 | 40.296.000 ERP | 204,061 | 60.1 | 7,2 | 6,0 | 4,500 | 75 | 5.9 | 150 | YES | BUILT-IN |
| ProHeat 100 | 98.087.607 ERP | 333,352 | 97.7 | 10,5 | 7,9 | 8,800 | 100 | 4.6 (400V) | 180 | YES | OPTIONAL |
| ProHeat 30 SH | 98.087.300 SH | 104,000 | 30 | 3,4 | 2,8 | 1,900 | 55 | 2.6 | 120 | YES | BUILT-IN |
| ProHeat 60 SH | 40.296.000 SH | 204,061 | 60.1 | 7,2 | 6,0 | 4,500 | 75 | 5.9 | 150 | YES | BUILT-IN |
| ProHeat 100 SH | 98.087.607 SH | 333,352 | 97.7 | 10,5 | 7,9 | 8,800 | 100 | 4.6 (400V) | 180 | YES | OPTIONAL |

TECHNICAL SPECIFICATIONS (dimensions and weights on back page)














Thermobile UK ltd, 11-12 Buckingham Close, Bermuda Ind Est, Nuneaton, CV10 7JT Tel 02476357960 Fax 02476357969 E mail sales@thermobile.co.uk website www.thermobile.co.uk Company Reg No 2839280 Vat No GB620089073




THERMOBILE

PROHEAT SWIVEL HEAD RANGE

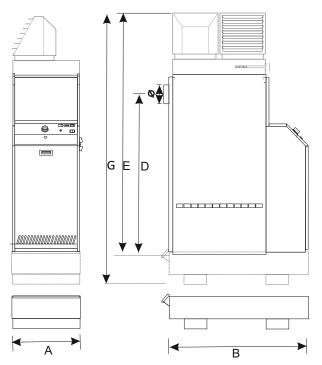

PRO HEAT STANDARD RANGE

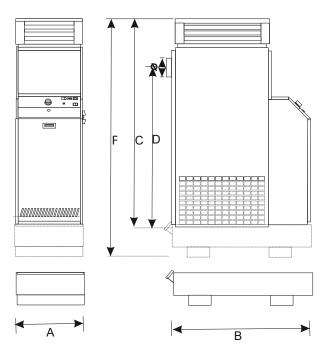

NOTE
PROHEAT 30 & 60 INCLUDE A BUILT IN TANK
PROHEAT 100 TANK IS OPTIONAL FITTED
UNDER THE HEATER

98087094, PROHEAT 30 FLUE KIT

FLUE KIT GIVES 4M CLEARANCE MEASURING FROM FLOOR LEVEL FLUE COMPONENTS EXTRAS IF REQUIRED 41900821, FLUE PIPE, 1 METRE X 150MM 41900825 45 ELBOWS FOR OFFSET OR WALL EXIT

98087095, PROHEAT 60 FLUE KIT

FLUE KIT GIVES 4M CLEARANCE MEASURING FROM FLOOR LEVEL FLUE COMPONENTS EXTRAS IF REQUIRED 41900821, FLUE PIPE, 1 METRE X 150MM

98087096, PROHEAT 100 FLUE KIT

41900825 45 ELBOWS FOR OFFSET OR WALL EXIT

FLUE KIT GIVES 4M CLEARANCE MEASURING FROM FLOOR LEVEL FLUE COMPONENTS EXTRAS IF REQUIRED 41910212, FLUE PIPE, 1 METRE X 200MM 41910229, 45 ELBOWS FOR OFFSET OR WALL EXIT

| Size mm | 30 | 60 | 100 | |
|---------|------|------|------|--|
| Α | 500 | 540 | 760 | |
| В | 1020 | 1120 | 1400 | |
| С | 1600 | 1700 | 2000 | |
| D | 1240 | 1320 | 1580 | |
| E | 1780 | 1850 | 2230 | |
| Ø Flue | 120 | 150 | 180 | |
| F | | | 2277 | |
| G | | | 2507 | |

Thermobile UK Itd, 11-12 Buckingham Close, Bermuda Ind Est, Nuneaton, CV10 7JT
Tel 02476357960 Fax 02476357969 E mail sales@thermobile.co.uk website www.thermobile.co.uk
Company Reg No 2839280 Vat No GB620089073

